


All cables in the signal path are pure silver cables provided by 'Dope Sounds' (www.dope-sounds.de).




The blue input cable is the top-end NF interconnect cable with mica insulation. The case is a very compact slide-in case for Euro-format boards.

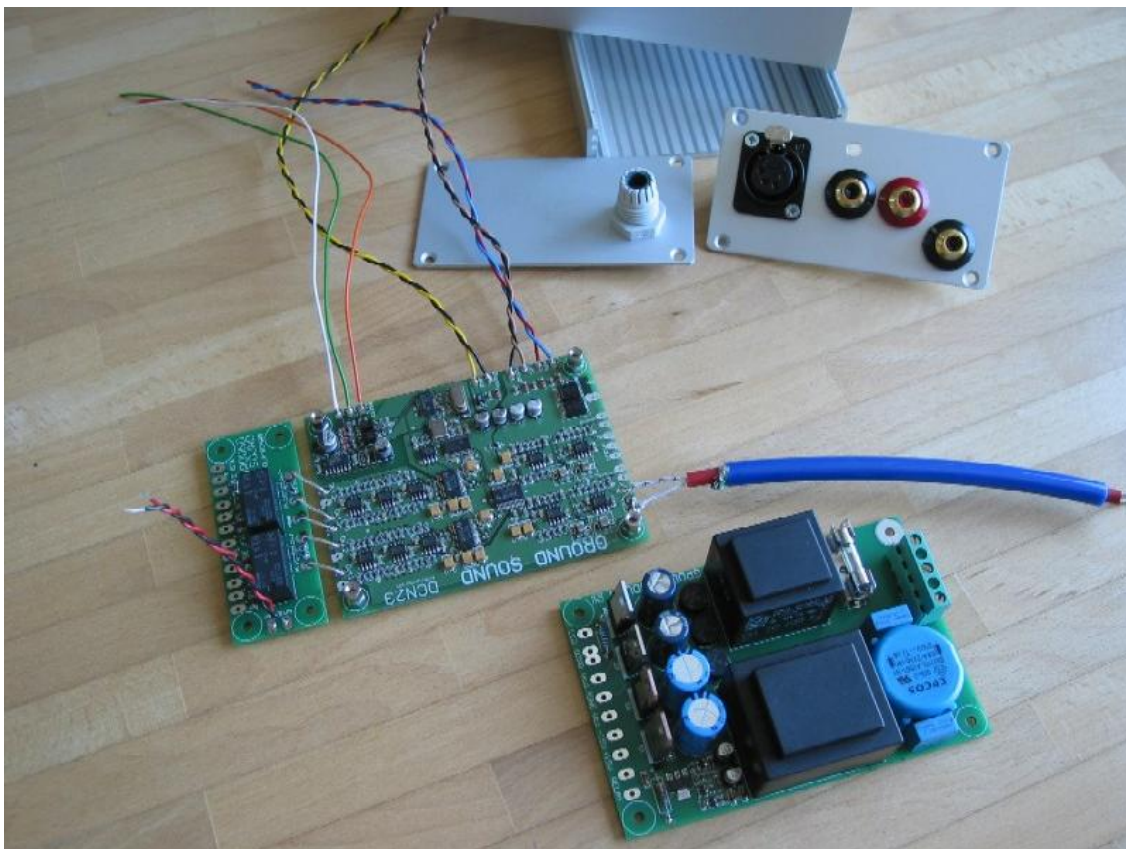

Detail of the case with front plate.



Ready for the first test. Please note the double layer copper board connected to ground to stop noise induction. PSU is mounted on 3mm spacers, DCN sits on 8mm spacers below the board. With no source signal and volume turned up completely there is no audible noise from the PSU!

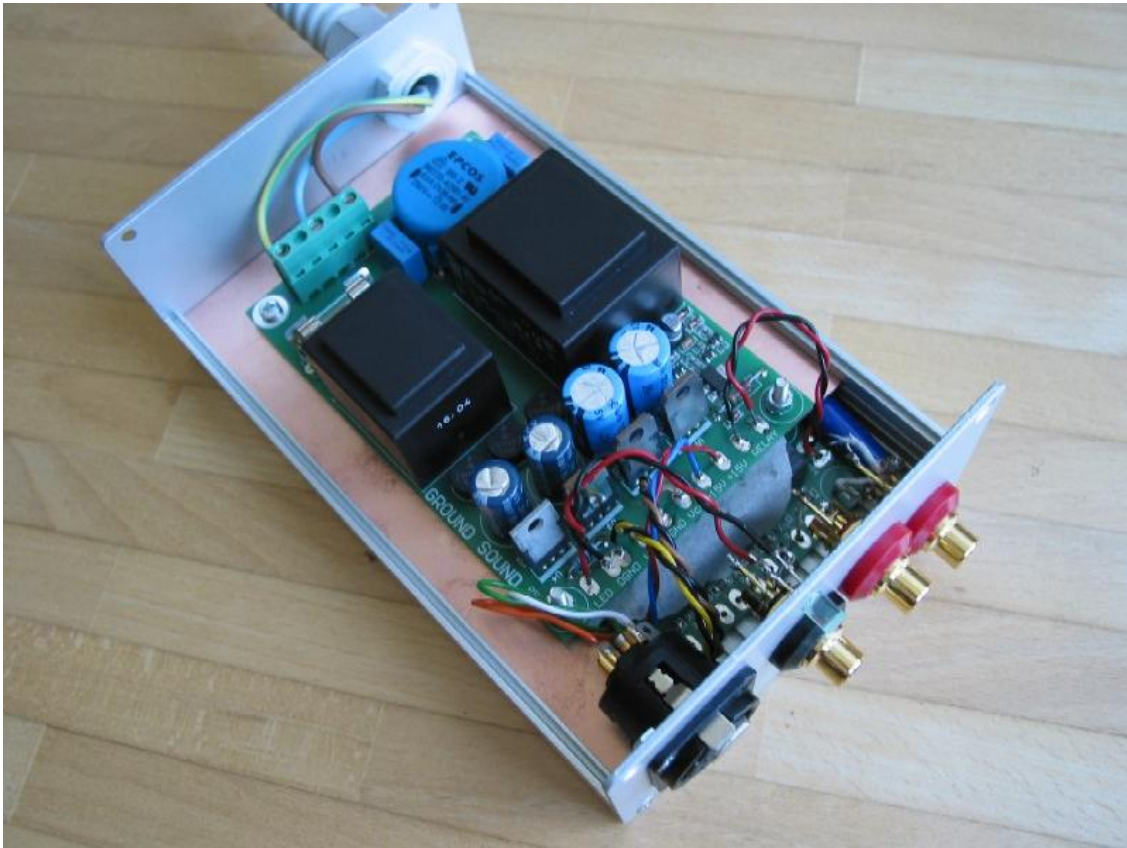

Total stack height is 47mm, free space inside the case 48mm.

